



# Xp<sup>3</sup>D-C

## Cetane Improver

Xp<sup>3</sup>D-C is a cost effective additive used to raise the cetane number of distillate fuel stocks and to lower diesel exhaust emissions.

### CHARACTERISTICS AND BENEFITS


- Effective in all fuels
- Enables a refiner to use more cracked stocks in diesel
- Useful in upgrading heating oil to diesel fuel quality
- Low cost cetane-number-barrel
- Reduces diesel emissions
- Registered with the U.S. EPA, California Air Resource Board (CARB), and Environment of Canada

### RECOMMENDED USES

Auto transport  
Agricultural Equipment  
Ships and Boats  
Industrial plants

### TREATMENT RATIO

Depending upon the fuel composition and the desired cetane number target, our cetane improver is normally used in the range of 0.05% to 0.25% volume. For example, in fuels with a base of cetane 41, you can see an increase from 2 to 6 points dosing from 1:4000 a 1:1000.

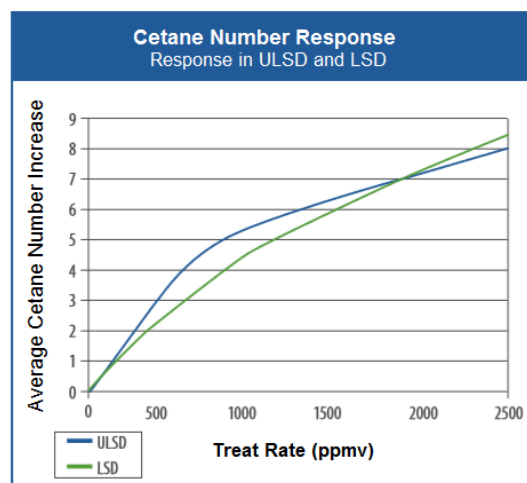

---

## Xp Lab, Inc.

12527 Kirkham Ct. Poway, CA 92064  
Tel. (858) 842-1527

[Xp3@xplab.com](mailto:Xp3@xplab.com) <http://www.xp3.com>



## PHYSICAL PROPERTIES

Flash Point:	72° C / 162° F
Pour Point:	-40° C / -40° F
Weight per Gallon (USA):	8.0 lbs.
Specific Gravity:	0.96 @ 20°C / 68°F
Viscosity at 20° C (68° F):	1.8 mPa.s or cP

---

### **Xp Lab, Inc.**

12527 Kirkham Ct. Poway, CA 92064  
Tel. (858) 842-1527

[Xp3@xplab.com](mailto:Xp3@xplab.com)    <http://www.xp3.com>